


ACCESSORY

Rubber-jacketed magnet Ø43 mm

Flat Ø43 mm magnetic system with a rubber jacket that does not scratch or mark, and an M6 threaded bush to screw the gripper or an eye bolt straight in.

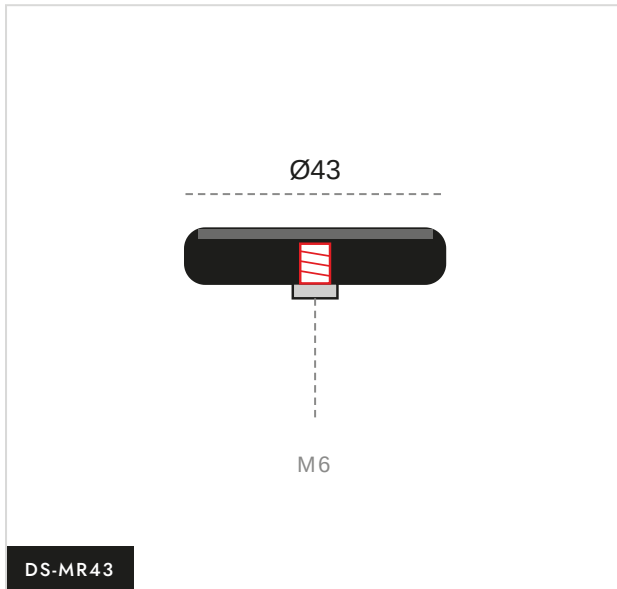

TECHNICAL DATA

Dimensions	Ø43 × 6 mm
Thread / fixing	M6 female
Material	Neodymium magnet with rubber jacket and M6 threaded bush
Finishes	White (WH) · black (BK)
Working load	Pending test

INSTALLATION

1

Clean the steel and place the magnet gradually, without impact.

2

Measure the actual force on site with a force gauge; the working load is at most 1/5 of that value.

3

Above walkways, add a safety cable to an independent point.

ORDER CODE

DS-MR43-WH|BK

Part of: DS-M-M6, DS-M-U24

DSUSPEND LABORATORY TESTS

Tensile test to failure	☐ PENDING
Slip under load	☐ PENDING
Salt spray ISO 9227	☐ PENDING
Adjustment cycles	☐ PENDING

SAFETY



Static loads only



No chlorine or corrosive areas



No grease or lubricants



Never use frayed cable



Maximum 60° inclination



Do not paint components

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.