


COMPONENT

Spiral anchor

Threaded spiral for mineral and fibre wool panels: screwed in by hand, spreading the load through the core.

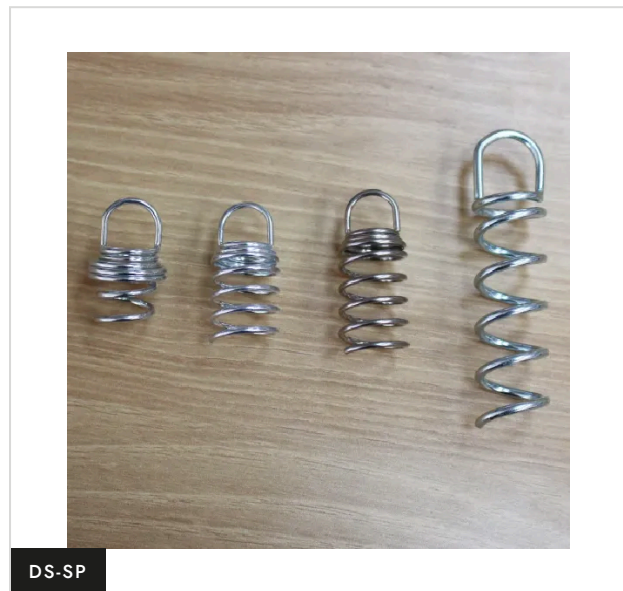

TECHNICAL DATA

Dimensions	Length 30 · 40 · 60 mm
Application	Mineral · fibre wool
Material	Zinc-plated steel
Finishes	Zinc-plated
Working load	Pending test

INSTALLATION

1

Screw the spiral into the mineral wool clockwise.

2

Leave the eye flush with the top face of the panel.

3

Engage the cable hook in the eye.

ORDER CODE

DS-SP-ZN

Part of: DS-W-SP

DSUSPEND LABORATORY TESTS

Tensile test to failure	☐ PENDING
Slip under load	☐ PENDING
Salt spray ISO 9227	☐ PENDING
Adjustment cycles	☐ PENDING

SAFETY



Static loads only



No chlorine or corrosive areas



No grease or lubricants



Never use frayed cable



Maximum 60° inclination



Do not paint components

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.