


COMPONENT

T24 grid clip

Clip for T24 suspended-ceiling grid: hangs panels below a modular ceiling without drilling.

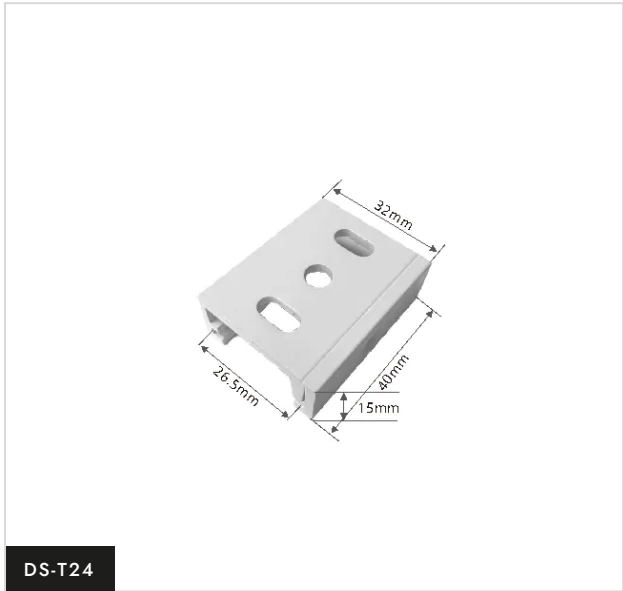

TECHNICAL DATA	
Dimensions	32 x 26.5 mm
Thread / fixing	24 mm T grid
Material	Zinc-plated steel
Finishes	Zinc-plated
Working load	Pending test

INSTALLATION

- 1

Snap the clip onto the flange of the T grid profile.
- 2

Check that it is centred and fully seated.
- 3

Hang the cable or accessory. Do not exceed the grid load.

ORDER CODE

DS-T24-ZN

Sold separately

DSUSPEND LABORATORY TESTS

Tensile test to failure	☐ PENDING
Slip under load	☐ PENDING
Salt spray ISO 9227	☐ PENDING
Adjustment cycles	☐ PENDING

SAFETY

-
- Static loads only
-
- No chlorine or corrosive areas
-
- No grease or lubricants
-
- Never use frayed cable
-
- Maximum 60° inclination
-
- Do not paint components

Provisional document: data will be completed with our laboratory tests. Images for reference only. Data subject to change without notice.